
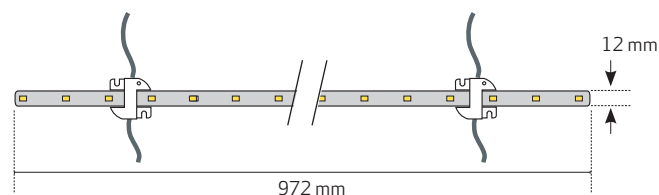


LED MANTA PERSONALIZED CONNECTION


Ref. **546016000434** 6000°K 720 lm

Mínimum 1 m²


- PCB 36 SMD 2835
- 8,6 W
- Input: 24 VDC
- Electrical class: Suitable for class I and class II applications.
- No Dimmable
- Colour: 6000°K
- Maximum ta value: ta 40°C
- Maximum tc value: tc 85°C
- CRI > 80
- LED aperture: 120°
- Dissipation temperature: Heat dissipation is not required..
- Storage temperature: - 10°C - 50°C
- Risk group: IEC 62471 GR0

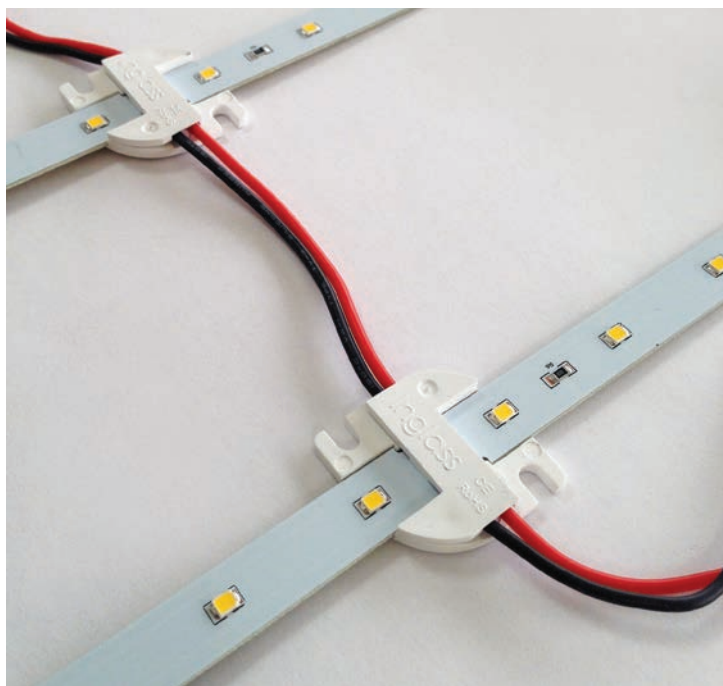


A

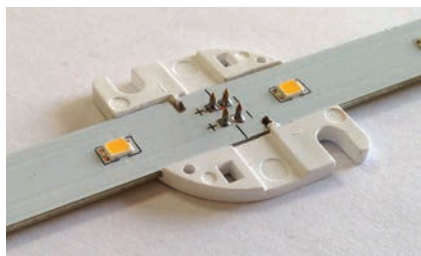

B

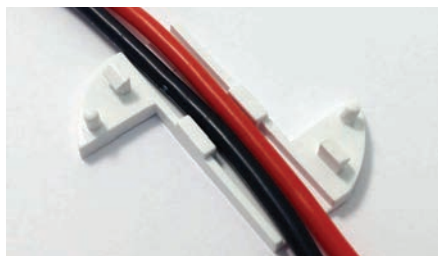

C

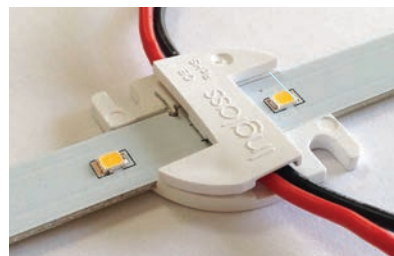

A.- Led strips fixed system are included

B.- Colocation of wires into the cover.

C.- By pressing the cover with cables into the base with pins, the connection will be done.
(bearing watch over the position + and -)

APPLICATIONS



SAFETY:

- The LED module should be installed on a clean, flat assembly surface to ensure that acceptable operating temperatures are not exceeded.
- Device sensitive to electrostatic discharges (ESD). Handle with care in order to avoid such discharges.
- The LED module should be installed by a qualified technician.
- This product should only be used for lighting purposes. Incorporate use model in lamps.
- Active parts should not be accessible to consumers.
- Store in a dry, covered place



ESD