



STANDARD PCB LED 15 W - 700mA

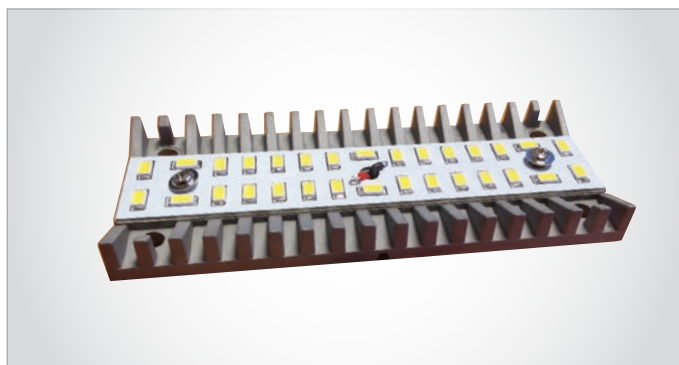

PCB + HEATSINK

Ref. **546005400430** 15 W 1500 lm 19,8V 3000°K 700mA


Ref. **546005400433** 15 W 1500 lm 19,8V 4000°K 700mA

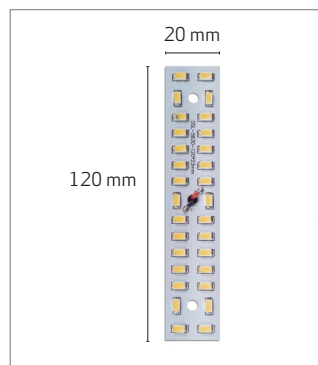

PCB

Ref. **546506432000** 3000°K

Ref. **546506431000** 4000°K

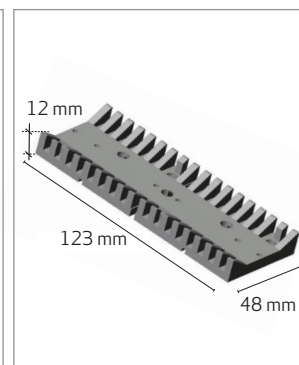

HEATSINK

Ref. **546004000000**




SAFETY:

- The LED module should be installed on a clean, flat assembly surface to ensure that acceptable operating temperatures are not exceeded.
- Device sensitive to electrostatic discharges (ESD). Handle with care in order to avoid such discharges.
- The LED module should be installed by a qualified technician.
- This product should only be used for lighting purposes. Incorporate use model in lamps.
- Active parts should not be accessible to consumers.
- Store in a dry, covered place



- Disponible con o sin disipador
- 30 SMD 5630
- Electrical class: Suitable for class I and class II applications.
- Dimmable
- Colour: 3000°K o 4000°K
- Maximum ta value : ta 40°C
- Maximum tc value : tc 85°C,
- CRI > 80
- LED aperture: 120°
- Dissipation temperature: Always install the Module LED on a heat dissipating surface. Recommended on metal surfaces.
- Storage temperature: - 10°C - 50°C
- Risk group: IEC 62471 GR0
- Power supplies should be compliant with all applicable European directives
- With Thermal Conductive Phad

DRIVER RECOMMENDED

		qty PCB		L x W x H mm				
	Ref. 547001000000	30 SMD	x1	700 mA	Max. 16 W	15 W	1428 lm	131x 37x 28